
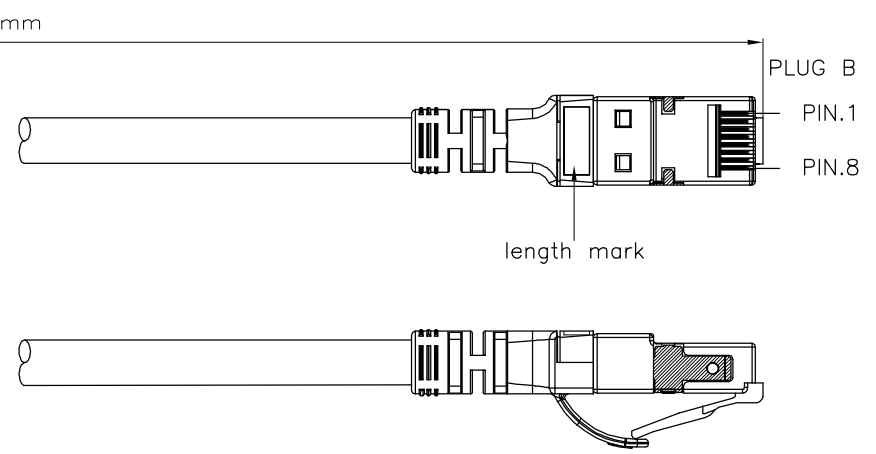


1 2 3 4 5 6

A


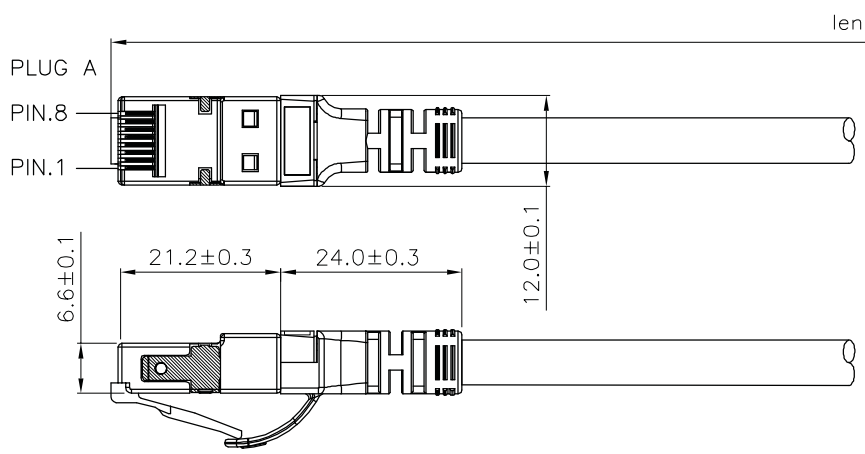


A

B

B

roline S/FTP PATCH CABLE 26AWG 4PR ISO/IEC 11801 & EN50288 CAT.6 LSOH XXXXXXXX-X

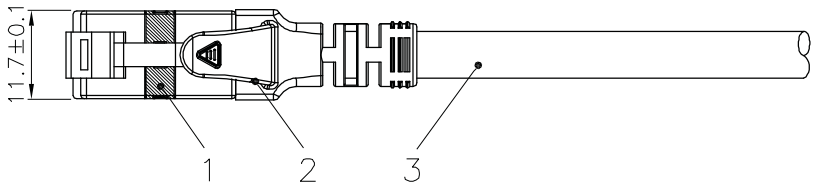

- (1) Jacket Color: Blue (RAL5015)
- (2) Wiring:T568B

item no.	length	tolerance
21.15.2140	0.5M	+20 -0
21.15.2141	1M	+20 -0
21.15.2142	2M	+20 -10
21.15.2143	3M	+20 -10
21.15.2145	5M	+20 -20
21.15.2146	7M	+30 -20
21.15.2147	10M	+30 -20
21.15.2148	15M	+30 -20
21.15.2149	20M	+70 -30

Specification :

- Material :
- RJ45 Plug : (JE P/N : PUS8850)
    - Housing : Polycarbonate, UL 94V-2, Transparent color
    - Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated
    - Contact finished : Min. 50 micro-inch Gold plated on surface contact area
    - Shield : Bronze with Nickel plated
  - SR : SR-V95 FOR S/FTP Boot with nose
  - Cable :
    - Jacket : LSOH
    - Conductor : 26 AWG stranded copper
    - Isolation : PE
    - Shield : Aluminum Foil Shielded for Each Pair, copper clad with steel braid
  - Cable structure : S/FTP, 4 twisted pair
  - Minimum Banding Radius: 50mm

C

C

D

D

item no	21.15.2140	21.15.2141	21.15.2142	21.15.2143	21.15.2145
	21.15.2146	21.15.2147	21.15.2148	21.15.2149	
Desc	ROLINE Cat 6 S/FTP Patch Cord,LSOH.Component Level,blue				
"#": Matching DIM.	DRAWING	25.Aug.2015	byz		
"*": Important DIM.	CHECK	25.Aug.2015	Jane		
Others General DIM.	APPROVAL	25.Aug.2015	Jaimy		
GENERAL TOLERANCE OF DIMENSIONS		DATE	NAME		
X.XXX ±0.005	SCALE	1/1 (A4)	UNIT	mm	
X.XX ±0.05	DRAWING NO.				
X.X ±0.1	DRAWING CLASSIFICATION		S	SHEET	1 OF 1

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER

1 2 3 4 5 6 10cm